


type number: **DSU 100\_PO; DSU 100\_POF** - for cable tray width 50, 75, 100 mm  
**DSU 200\_PO; DSU 200\_POF** - for cable tray width 150, 200 mm  
**DSU 300\_PO; DSU 300\_POF** - for cable tray width 300 mm

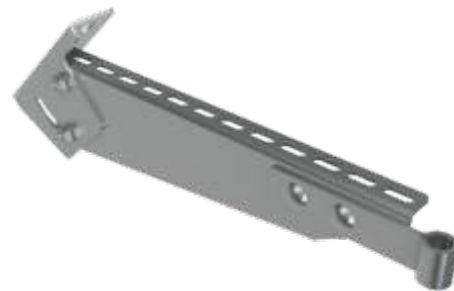

product description: DSU holders are designed for fixing cable trays to sloping structures up to a 45° angle.

The end of the holder needs to be fixed to the wall or ceiling using ZT threaded rod.

DSU holders are supplied only to order.

configuration: PO - Pre-Galvanized, zinc-layer 15 - 27 µm  
 POF - Hot Dip Galvanized, zinc-layer 55 µm (min. 45 µm)

sales amount: á 1 pc

classification: ČSN 73 0895 P 90-R  
 DIN 4102-12 E 90  
 STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: EN 60721-3-1

