


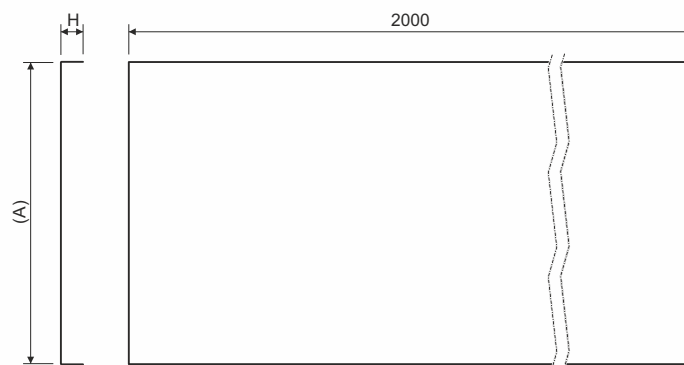

item number	for width of cable tray / ladder (A) (mm)	height H (mm)	thickness of metal sheet (mm)	weight (kg/m)	
V 40_S	40	10	0,55	0,26	
V 40_ZM			0,75	0,35	
V 50_S			0,55	0,31	🔥🔥
V 50_F	50	11	0,80	0,54	🔥🔥
V 50_ZM			0,75	0,42	🔥🔥
V 62_S	62	11	0,55	0,36	🔥
V 62_F			0,80	0,62	🔥
V 75_S	75	11	0,55	0,43	🔥🔥
V 75_F			0,80	0,72	🔥🔥
V 100_S	100	11	0,55	0,53	🔥🔥
V 100_F			0,80	0,91	🔥🔥
V 100_ZM			0,75	0,71	🔥🔥
V 125_S	125	11	0,55	0,64	🔥
V 125_F			0,80	1,10	🔥
V 150_S	150	11	0,55	0,75	🔥🔥
V 150_F			0,80	1,30	🔥🔥
V 200_S	200	11	0,55	0,98	🔥🔥
V 200_F			0,80	1,68	🔥🔥
V 200_ZM			0,75	1,31	🔥🔥
V 250_S	250	11	0,55	1,20	🔥
V 250_F			0,80	2,05	🔥
V 300_S	300	11	0,80	2,07	🔥🔥
V 300_F			1,00	2,73	🔥🔥
V 300_ZM			0,75	1,90	🔥🔥
V 400_S	400	14	1,00	3,43	🔥🔥
V 400_F			1,00	3,63	🔥🔥
V 400_ZM			1,00	3,40	🔥🔥
V 500_S	500	14	1,00	4,22	🔥
V 500_F			1,00	4,80	🔥
V 500_ZM			1,00	4,20	🔥
V 600_S	600	14	1,20	6,27	🔥
V 600_F			1,20	6,70	🔥

product description:

The cable tray cover is used to cover cable trays and cable ladders.

The standard length of the cable tray cover is 2 m. Mentioned thickness of the metal plate is just orientation.

The fixing of the cover to the tray is done using the cover fixture VU (2 pcs per meter), except for V 40. The V 40 cover may be alternatively fixed using a clamping belt.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15 - 27 µm

F - Hot Dip Galvanized according to EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount:

2 m

meets the requirements: ČSN EN 61537:02

classification 🏆:

ČSN 73 0895 P 90-R

DIN 4102-12 E 90

STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

🔥 products approved for standard constructions

🔥 products approved for non-standard constructions

storage:

ČSN EN 60721-3-1

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



cover



stretch film