


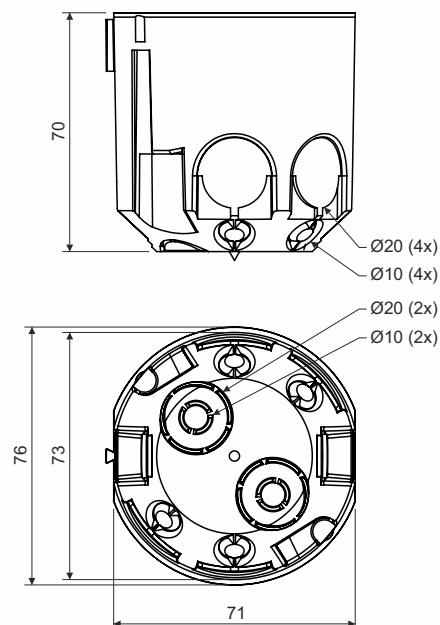

product
description:

designed for distribution system with voltage 400 V and with maximum current 16 A
easy installation of devices with big depth
easily clamp under the device using screwless terminals or terminal plate
join into a continuous series with a spacing of 71 mm
connectible with the box KU 68/71L
jointed boxes can be interconnected using single insulated wires
integrated tip to mark the centre of drilling
when mounting, it is not necessary to countersink the plasterboard edge
mounting screws are fitted with a triple thread for quick installation
allows to install double-socket

material: PVC (Pb Free)

color: yellow

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 52 g

meets the requirements: EN 60 670-1

storage: ČSN 64 0090

KPR 68/71L_NA - individual boxes fitted with screws for mounting into double wall - package: 60 pcs boxes loose in cardboard

accessories:

cover V 68

terminal plate S-66

screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools:

drill for hollow walls - set VDS 68 (universal carrier VPTU + saw-drill VPT 68)

recycling codes:



box



screws, feet



carton

WARNING

risks associated
with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
make sure the box is properly attached and secured to prevent accidental loosening
installing an unsuitable box can negatively affect the sound and thermal insulation of the room
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers